




Assembly Instructions For Dual Mount Hanging System

Convert carabiner system to swivel system

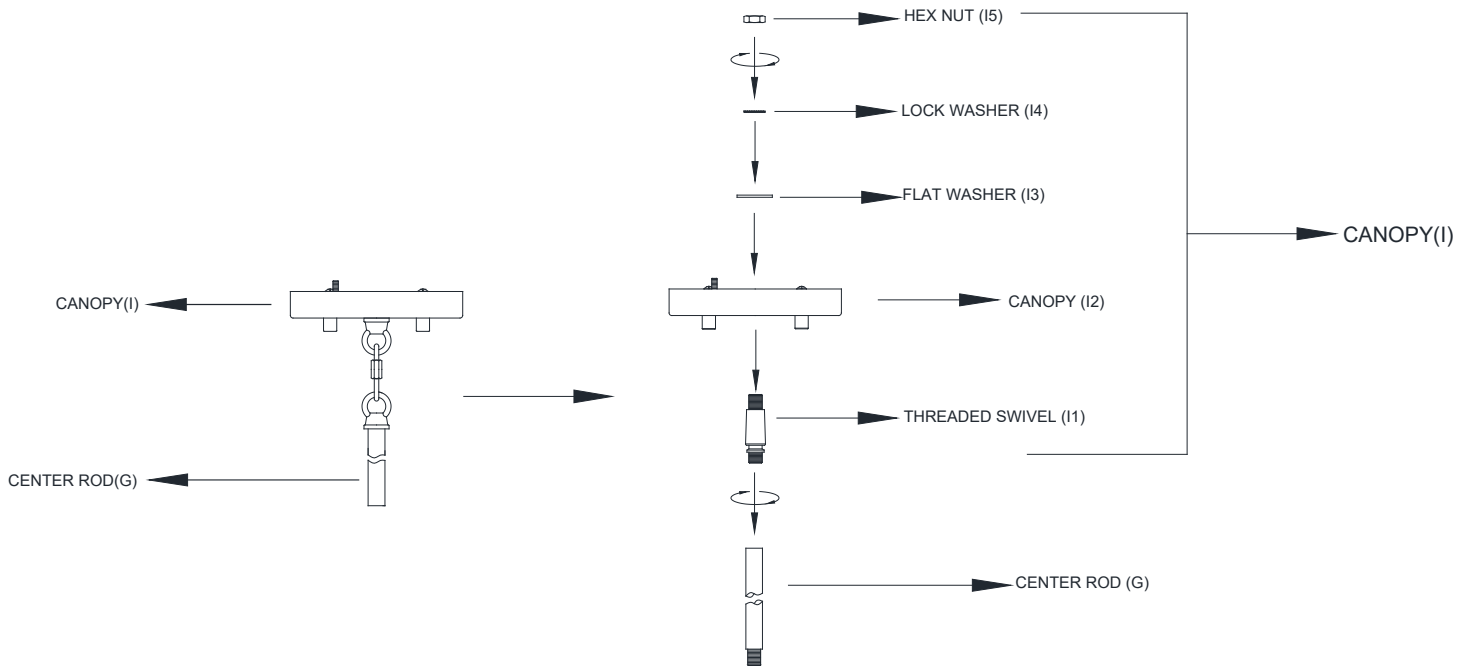

1. Remove the loop, flat washer, lock washer, and hex nut from the canopy (I) and center rod (G).
2. Thread wire from center rod (G) through threaded swivel (I1) and canopy (I2).
3. Install the threaded swivel (I1) into the top of center rod (G).
4. Place the threaded swivel (I1) into the canopy (I2).
5. Place the flat washer (I3) and lock washer (I4) onto the top of the threaded swivel (I1) and secure with hex nut (I5).

*This fixture contains hardware for our dual mount hanging system that allows for the use of a carabiner or an adjustable swivel. Either can be used with the included stems. The carabiner allows for a greater degree of adjustment for sloped ceilings. It is NOT intended to modify the fixture to be chain hung, as the chain may not be available for purchase in the needed finish.