



7

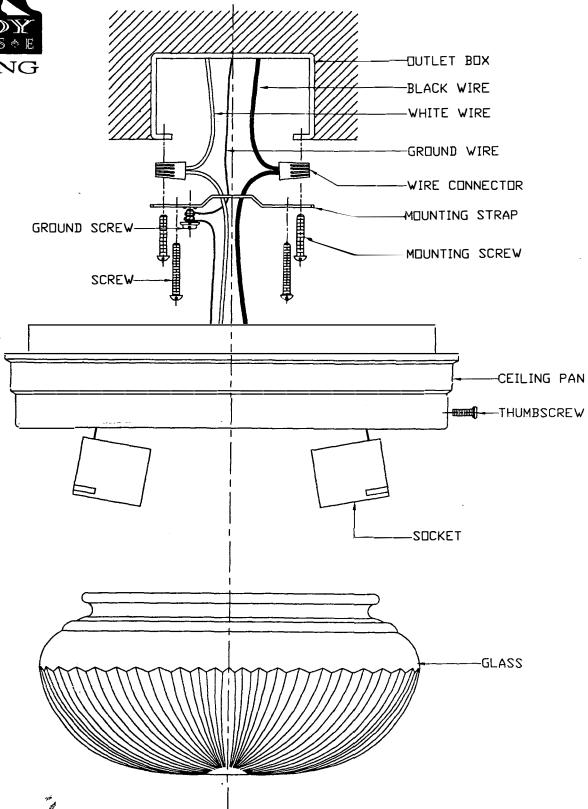

INSTALLATION AND SAFETY INSTRUCTION FOR CEILING FIXTURE

CAUTION! SHUT POWER OFF AT MAIN CIRCUIT BREAKER BEFORE INSTALLATION.


MOUNTING THE FIXTURE (FIG.1)

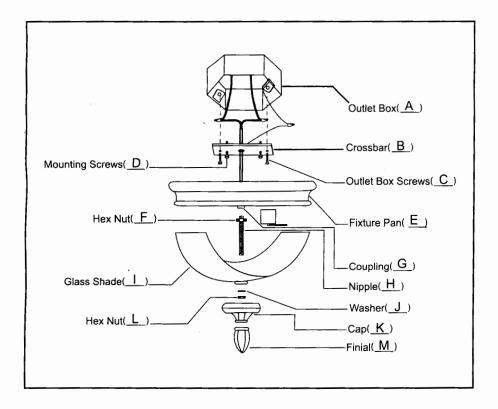

- 1. Turn electricity off at main circuit breaker. Remove the new fixture and mounting parts from the box and make sure that no parts are missing before installation.
- 2. Two Mounting Screws(D) should be threaded through the two mounting screw holes on the Crossbar(B).
- 3. Fasten the Universal Crossbar (B) to the Outlet Box (A) with (Two) Outlet Box Screws (Shown as C. Not Furnished) & "GND" on side of Crossbar (B) should be faced out.
- 4. Connect the wires as wiring instruction (See Wiring Diagram).
- 5. Mount the Fixture Pan(E) by placing it over both Mounting Screws(D) so that the screws protrude through the keyholes in the Fixture Pan(E). Rotate the Fixture Pan(E) until the screws are seated in the slots of the keyholes and tighten the screws with a screwdriver.
- 6. Thread the Nipple with Hex Nut(F) into the Coupling (G). The lower nipple length could be adjusted and secured by adjust the location of the hex nut on the center Nipple (H) for install the lower parts of the fixture.
- 7. Install the light bulbs in accordance with the fixture's specifications.

 DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
- 8. Insert the Glass Shade(I), Steel Washer(J) over the Nipple(H) in order, then secure with Hex Nut(L).
- 9. Insert the Cap(K) on to the Nipple(H) and thread the Finial(M) onto the Nipple(H) until snug.
- 10. Restore electrical power at the main circuit breaker.

CONNECTING THE WIRE (See Wiring Diagram)

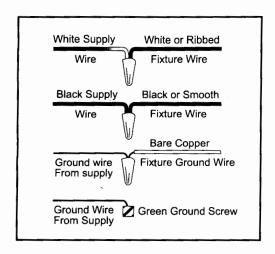

- Connect your grounding wire (Green or Bare copper) from
 Fixture to grounding wire on outlet box or to the green ground screw on the
 crossbar.
- 2. Connect the House White Wire to the Fixture White Supply Wire; connect House Black (or Red) Wire to the Fixture Black Supply Wire.
- 3. Make sure no bare wires can be seen outside of the wire connector.
- 4. Tuck the wires into outlet box carefully.

CONSULT A QUALIFIED ELECTRICIAN IF YOU HAVE ANY QUESTION



INSTALLATION ET INSTRUCTION DE SECURITE POUR LA FIXATION POUR LE PLAFOND

PRECAUTION! ETEINDRE LA PUISSANCE AU DISJONCTEUR DU CIRCUIT PRINCIPAL AVANT L'INSTALLATION

MUNICIPAL PERMITION (FIGURE 1)

